

HG®

BATHROOM

mould spray

without scrubbing
or scouring



500 ml e

HG mould spray

- without scrubbing or scouring
- for tile grout, silicone joints, plaster etc

HG mould spray immediately destroys fungus and algae in damp places, inside and outside. For cleaning tiled walls (also suitable for marble) and grouting in the bathroom, shower, toilet, kitchen, cellar, basement, sauna, swimming pool, garage, shed etc.. It cleans also facades, balconies, plant boxes, garden ornaments etc. but excluding wood. HG mould spray bleaches grey and black mould spots and green algae spots.

Directions for use: Remove the locking clip before use. The product has a bleaching action. If in doubt, first test on an inconspicuous area or a discreet place. Do not remove fungi and algae before using the product. Press the nozzle at the front side and turn a quarter. Spray the surface from 3 - 5 cm distance and leave it to work for 30 minutes. In case of stubborn stains, spray again and leave to work for another 30 minutes. Clean the sprayed surface with sponge and water. Elastic grouting (for instance silicone paste) must be washed off after 30 minutes and be treated again. Turn the nozzle a quarter backwards after use (blocking position). For cleaning large surfaces with green deposits, we advise *HG algae and mould remover*.



contains a.o.:	
anionic surfactants, chlorine-based bleaching agents	< 5%

TÜV SAARLAND GUT
 Produktbewertung
 04.002 TÜV Saarland 05194688

Kundenurteil

German Consumer Test Institute



PCS No.: 94357
 0518600105006
 2201

Product and tips? See:
HG.EU
 Consumer Services?
 Call: +44 (0)1279 588360


Dosage: 500 ml *HG mould spray* is suitable for 2-3 m² of wall surfaces, 6-8 m² of tile grout.

Attention: We recommend you to ventilate well during use and to wear rubber/plastic gloves. Prevent splashes on clothing, paintwork, plastic shower trays and vertical blinds. Rinse with water immediately in case of contact with skin, clothing and sensitive surfaces. Avoid contact with metals such as prints on ornamental strips, aluminium and stainless steel. Do not treat coloured surfaces. We do not recommend the use of this product on ceilings. In elastic grouting (for instance silicone paste) sometimes some permanent brown discolouration may occur after use. In badly glazed tiles and old tiles with hairline cracks brown discolouration may occur. This brown colour can possibly be removed with Hypo (Sodium thiosulfate), which can be obtained from your customer service department. Do not reuse the bottle. **Transport and store cool, dark and in an upright position.**

Medical personnel can request the data sheet via +31 36 54 94 777

The consumer's information sheet can be obtained via www.HG.eu

WARNING H315- Causes skin irritation.
H319- Causes serious eye irritation.
H400- Very toxic to aquatic life.
EUH206- Warning! Do not use together with other products.
 May release dangerous gases (chlorine). **P101-** If medical advice is needed, have product container or label at hand. **P102-** Keep out of reach of children. **P264-** Wash hands thoroughly after handling. **P273-** Avoid release to the environment.
P305+P351+P338- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. **P337+P313-** If eye irritation persists: Get medical advice/attention.

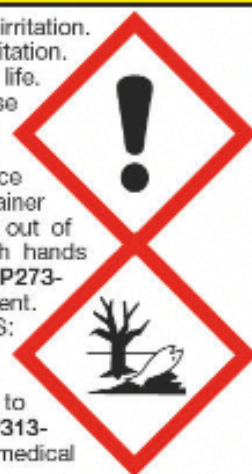

Made in The Netherlands by
 HG International b.v., Damsluisweg 70, 1332 EJ
 Almere, The Netherlands, Tel.: +31 36 54 94 700

HG Does what it promises.

UK importer: HG Hagesan (UK) Ltd,
 Weston Business Centre, Parsonage Road, Takeley,
 Essex, CM22 6PU. Tel.: +44 (0) 1206 822 744